

FACTS | FIGURES | DATA







Pressure relief valve V 185 · V 85

V 185 · V 85






FRANK
PREMIUM-QUALITY PLASTIC

CHARACTERISTIC GRAPHS V185

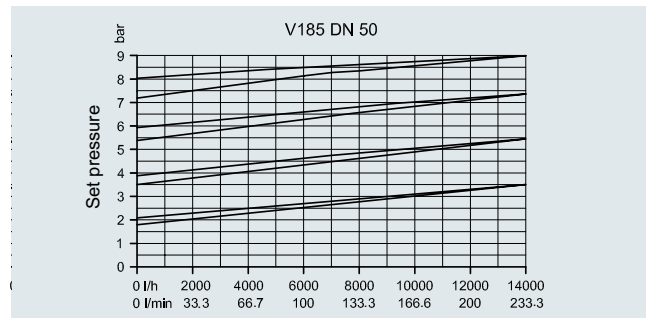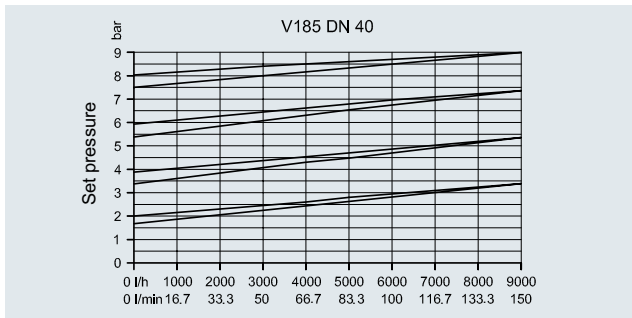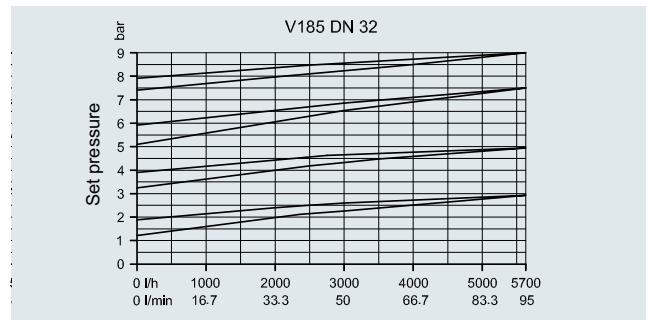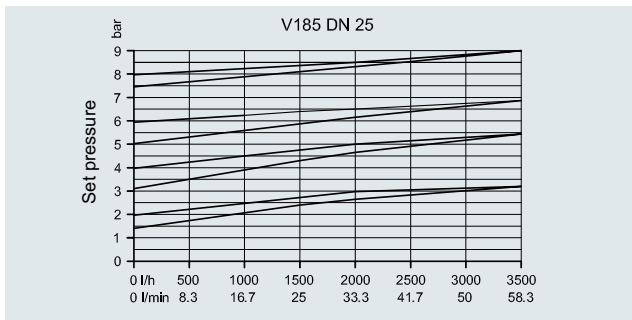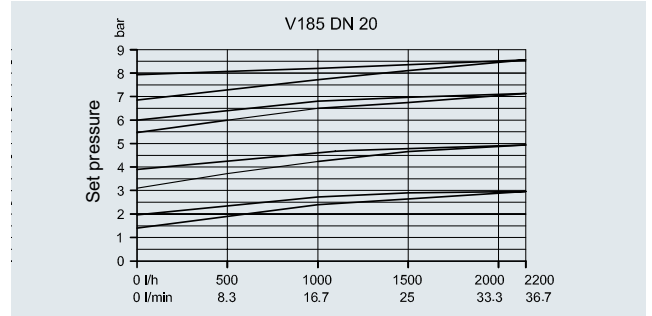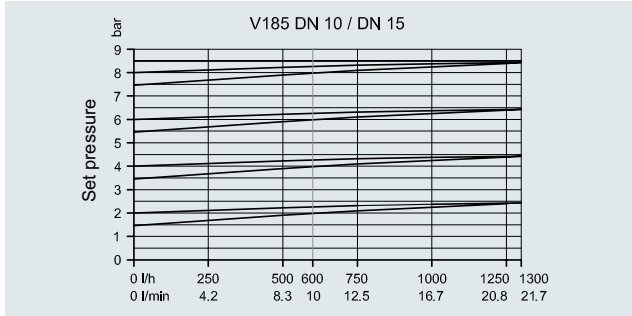

CHARACTERISTIC GRAPHS V85

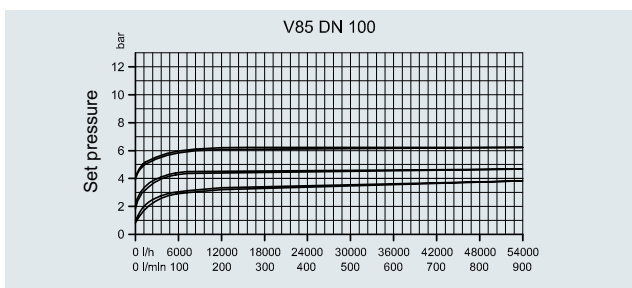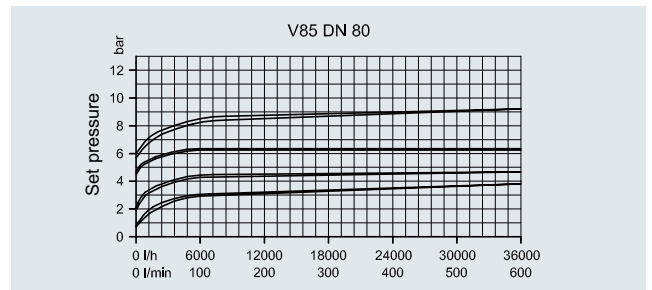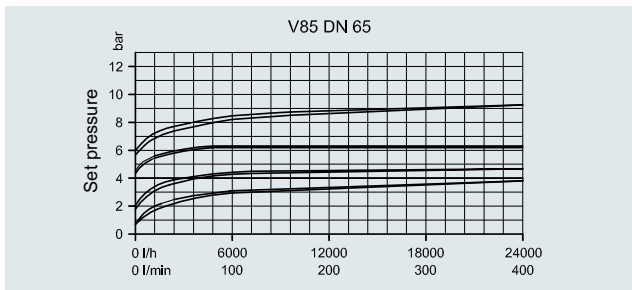


The characteristic curves on the graphs show the increase in the set pressure from 0 through to the maximum permissible flow rate. The upper and lower lines plot the course of the opening and closing pressure respectively. All characteristic curves apply to water at a temperature of 20 °C.

SPARE PARTS SET FOR V185 / V85 PVC-U / PP / PVDF

Set consisting of:	Type	DN	PVC/EPDM Article No.	PVC/PTFE Article No.	PP/EPDM Article No.	PP/PTFE Article No.	PVDF/PTFE Article No.
Pos. 3 diaphragm	V 185	10/15/20	17.006.007	17.006.020	17.006.007	17.006.020	17.006.020
Pos. 5 compression spring	V 185	25/32	17.006.008	17.006.021	17.006.008	17.006.021	17.006.021
Pos. 7 adjustment screw	V 185	40/50	17.006.009	17.006.022	17.006.009	17.006.022	17.006.022
Pos. 10 washer							

Set consisting of:	Type	DN	PVC/EPDM Article No.	PVC/PTFE Article No.	PP/EPDM Article No.	PP/PTFE Article No.	PVDF/PTFE Article No.
Pos. 6 diaphragm	V 85	65	17.006.140	17.006.143	17.006.262	17.006.265	17.006.274
Pos. 4 spring assembly	V 85	80	17.006.141	17.006.144	17.006.263	17.006.266	–
Pos. 2 adjustment screw	V 85	100	17.006.142	17.006.145	17.006.264	17.006.267	–
Pos. 8 piston, complete							

V 185

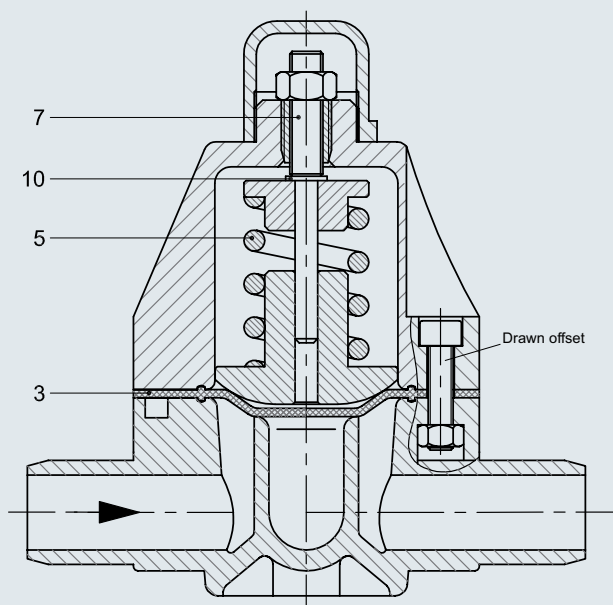

V 85

